

2/2-way valves DN 10

for slightly aggressive gaseous and liquid fluids

Solenoid actuated, with forced lifting

Diaphragm valves

Internal threads G 1/4 to G 1/2 or 1/4" NPT to 1/2" NPT

Operating pressure 0 to 10 bar

82560
82570

**Stainless
Steel**

Description (standard valve)

Solenoid valve for slightly aggressive gases and liquids

Switching function:	Normally closed
Flow direction:	determined
Fluid temperature:	-10 °C up to max. +90 °C
Ambient temperature:	-10 °C up to max. +50 °C
Mounting position:	optional, preferably solenoid vertical on top

Material

Body:	Stainless steel, PA 66
Seat seal:	NBR
Internal parts:	Stainless steel, PVDF, Sandvik 1802


For contaminated fluids insertion of a strainer is recommended (see accessories).



Features

- Suitable for vacuum
- Clear design
- Compact solenoid with integrated core tube
- Valve operates without pressure differential (Δp)

Symbol

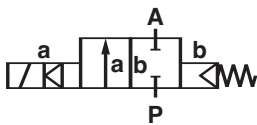

Ordering information

To order, quote model number from table overleaf, e.g. 8256200.9748 for a G 1/2 valve with standard solenoid.

Characteristic data

See page 2 valve and solenoid informations

Detmolder Strasse 256
D-32545 Bad Oeynhausen

PO Box 10 02 52-53
D-32502 Bad Oeynhausen

Phone ++49 5731 / 791-0
Fax ++49 5731 / 791-179

<http://www.buschjost.com>
mail@buschjost.de

Characteristic data

Valves

Part Number with DC solenoid	Part Number with AC solenoid	Nominal Diameter (mm)	Port size	Valve length (mm)	Operating Pressure *		kv-Wert ** (Base m³/h)	Weight (kg)
					min	max (bar)		
8256000.9748 8257000.9748	8256000.9749 8257000.9749	10	G 1/4 1/4" NPT	44	0	10	1.5	0.5
8256100.9748 8257100.9748	8256100.9749 8257100.9749	10	G 3/8 3/8" NPT	44	0	10	1.7	0.5
8256200.9748 8257200.9748	8256200.9749 8257200.9749	10	G 1/2 1/2" NPT	60	0	10	1.7	0.6

State voltage [V] and frequency [Hz]

* with gaseous and liquid fluids up to 25 mm²/s (cSt)

** Cv-value (US) ≈ kv-value x 1,2

9748 / 9749 Solenoid

Standard voltages

DC	AC 50 Hz
24 V	24 V
–	110 V
205 V	230 V

Design acc. to DIN VDE 0580

Voltage range ±10 %

100 % duty cycle

Protection class acc. to EN 60529 IP65

Socket acc. to DIN EN 175301-803 A

Power Consumption

According to DIN VDE 0580 at coil temperature +20 °C. In operating the solenoid coil decrease the power consumption appr. 30 %.

DC	AC	
	Inrush	Holding
12 W	13 VA	13 VA


For technical details see catalog-register "Solenoids"

Options (Valves)

- XXXXX03.XXXX Seat seal FPM,
max. fluid temperature +110 °C
- XXXXX14.XXXX Seat seal EPDM, for hot water,
max. fluid temperature +110 °C
- On request Further versions

Section View

Solenoid rotated by 90° in drawing

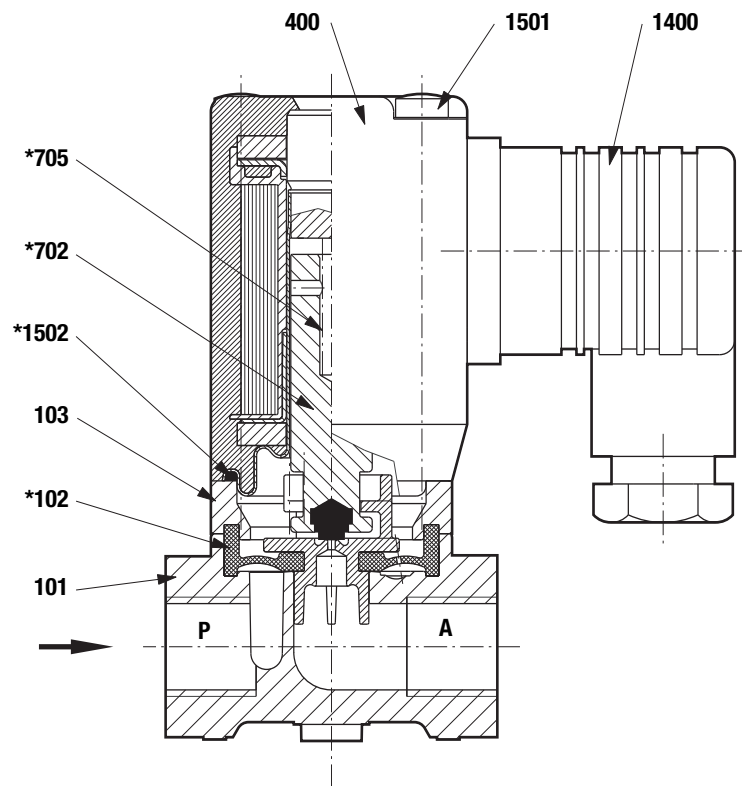


- 101 Valve body
- *102 Diaphragm
- 103 Spacer
- 400 Solenoid
- *702 Core
- *705 Pressure spring
- 1400 Socket
- 1501 Oval head cap screw
- *1502 O-ring

* These individual parts form a complete wearing unit.
When ordering spare parts please state Cat no and series no.

General Dimensions

Socket turnable 4 x 90°

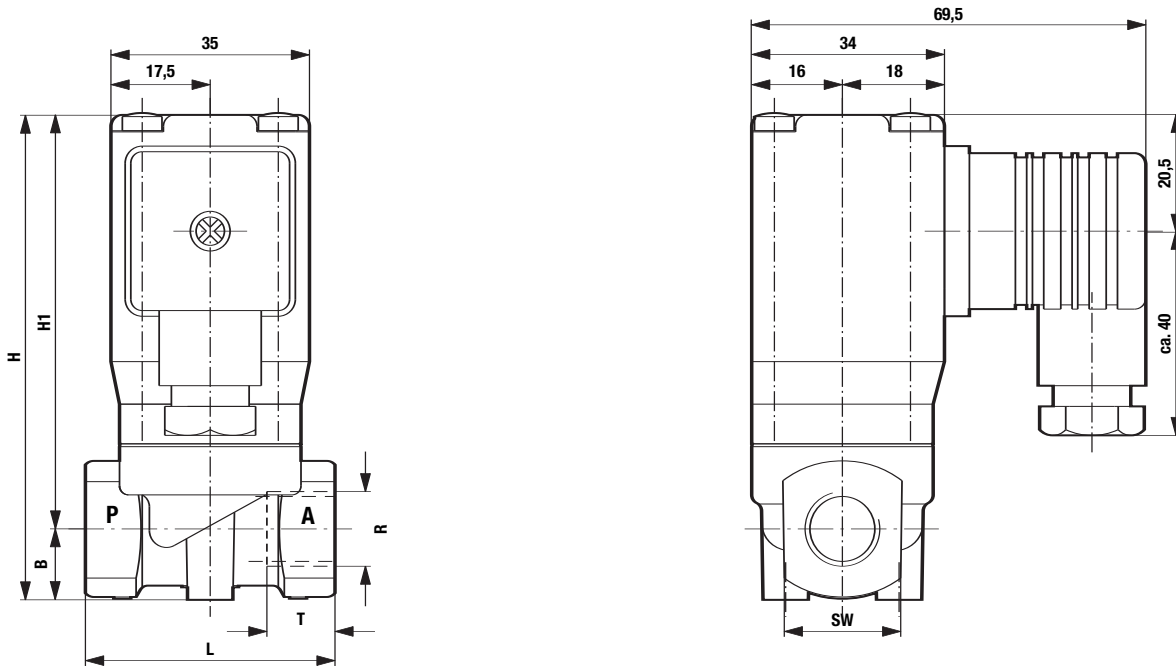

Part Number	L	H	H1	B	SW	R	T
8256000.974x 8257000.974x	44	85.5	73	12.5	21	G 1/4 1/4" NPT	12.0 10.0
8256100.974x 8257100.974x	44	85.5	73	12.5	21	G 3/8 3/8" NPT	12.0 10.0
8256200.974x 8257200.974x	60	79.5	75.5	12.5	27	G 1/2 1/2" NPT	15.0 13.0

Note to Pressure Equipment Directive (PED):

The valves of this series are according to Art. 3 § 3 of the Pressure Equipment Directive (PED) 97/23/EG. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 50081-1 and EN 50082-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (89/336/EEC) satisfied.